

MILGARD®

A250 Fastener Schedule

Appendix:

Page 1: Vertical Sliders

Page 2: Horizontal Sliders

Page 3: Slider Picture Windows

Page 4: Casements



Page 5: Awnings

Page 6: IMR Combinations

Page 7: Sliding Glass Doors

A250 Vertical Sliders



MILGARD.

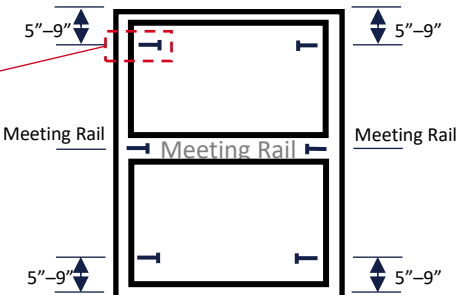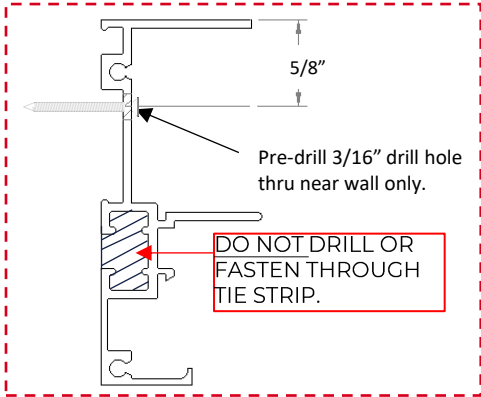


Drive QTY 6X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall.

A250 Horizontal Sliders

MILGARD.

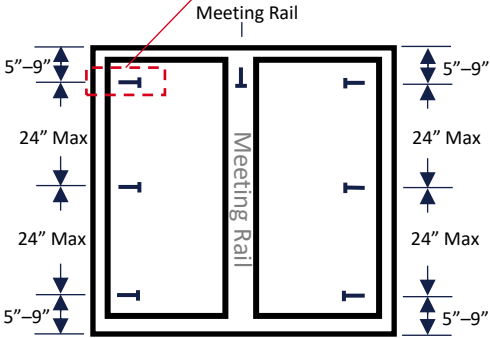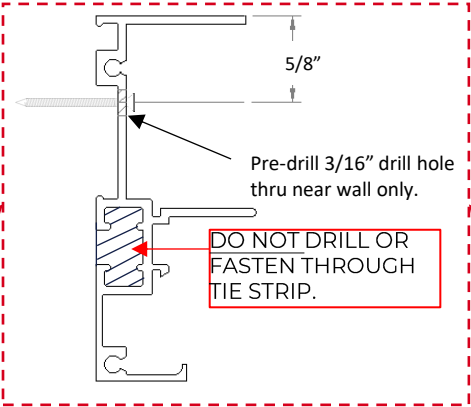



Drive minimum QTY 7X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall. Add additional fasteners as necessary to meet the spacing criteria.

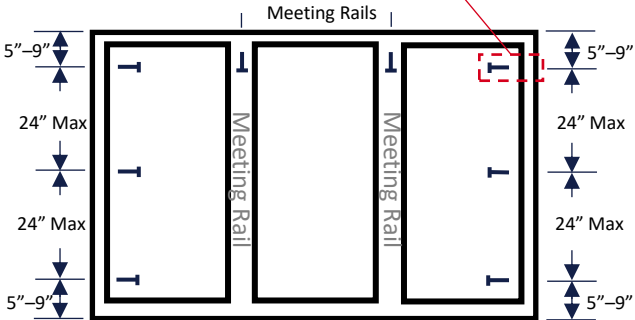

Drive minimum QTY 8X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall. Add additional fasteners as necessary to meet the spacing criteria.

A250 Slider Picture Windows



MILGARD.

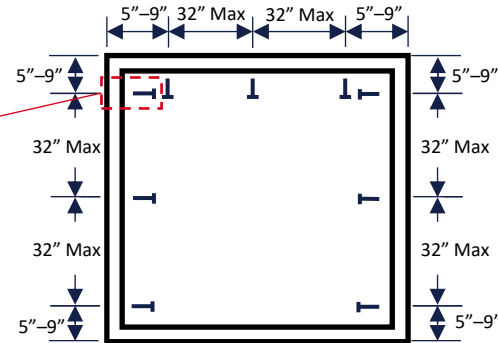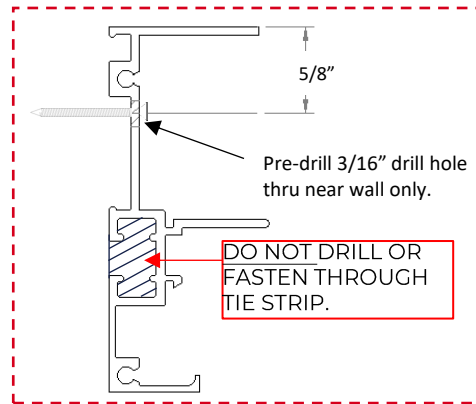

Drive minimum QTY 9X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall. Add additional fasteners as necessary to meet the spacing criteria.

A250 Casements



MILGARD.

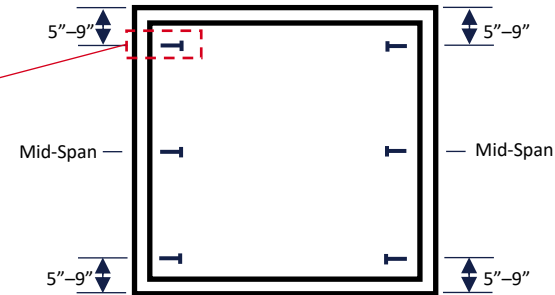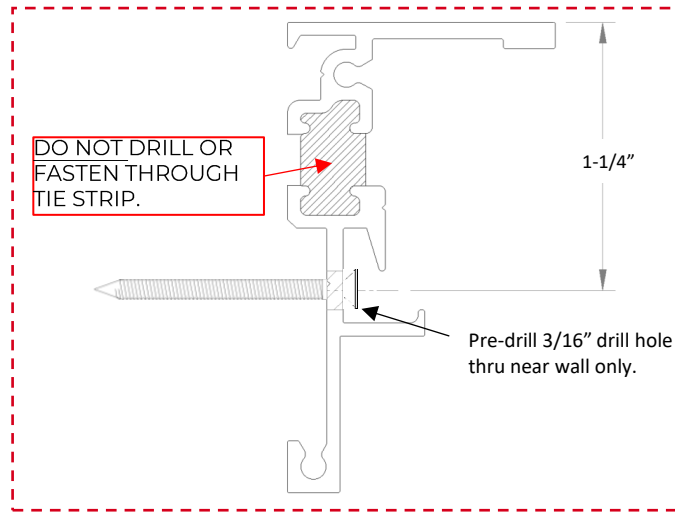

Drive QTY 6X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall.

A250 Awnings


MILGARD.

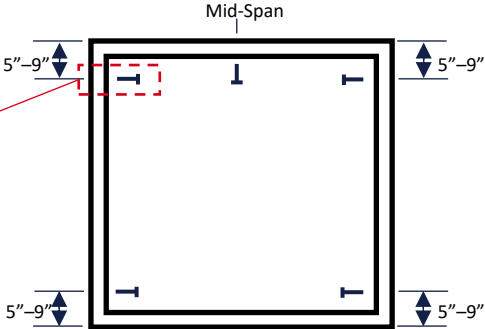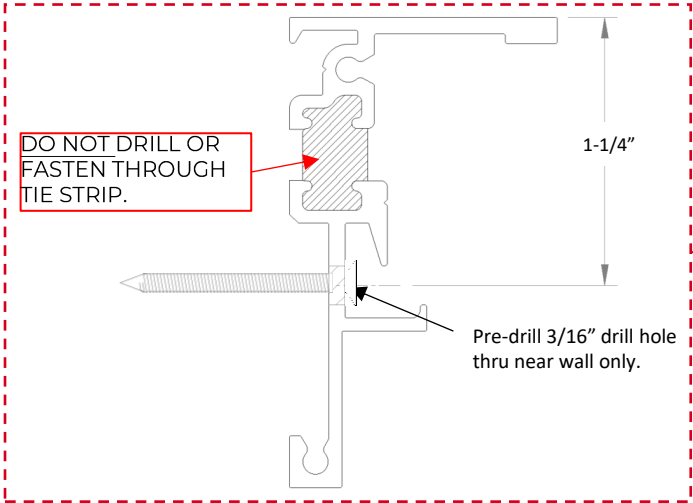


Drive QTY 5X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall.

A250 IMR Combinations


MILGARD®

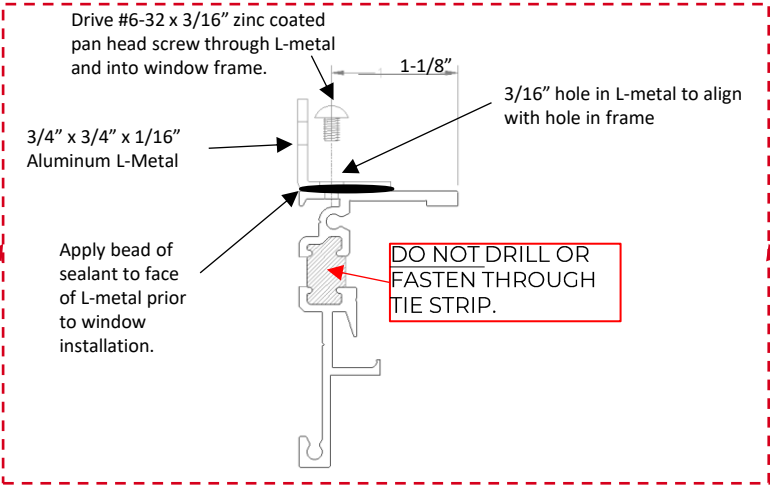

Drive minimum QTY 14X #8-15 x 2" zinc coated" flat head wood screws through L bracket and into rough opening. Add additional fasteners as necessary to meet the spacing criteria.

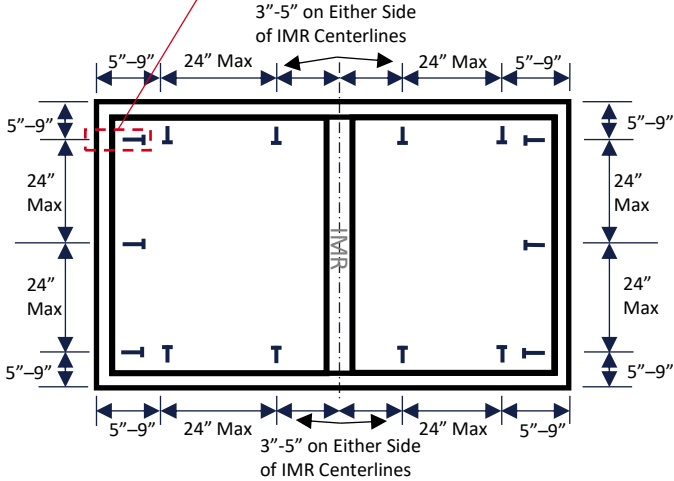

3"-5" on Either Side of IMR Centerlines


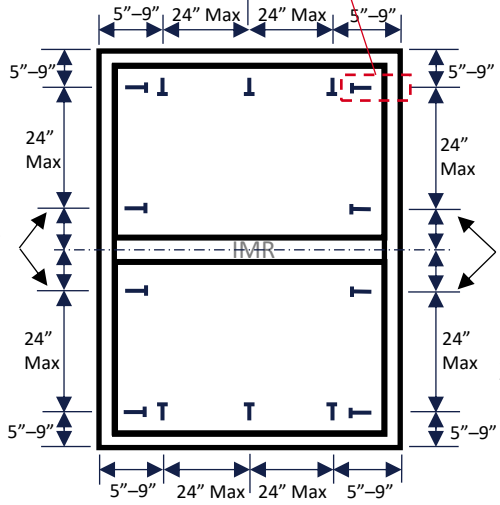


3"-5" on Either Side of IMR Centerlines

Drive minimum QTY 14X #8-15 x 2" zinc coated flat head wood screws through L bracket and into rough opening. Add additional fasteners as necessary to meet the spacing criteria.

A250 Sliding Glass Doors - Jambs


MILGARD.

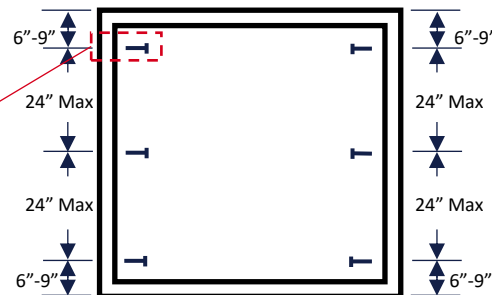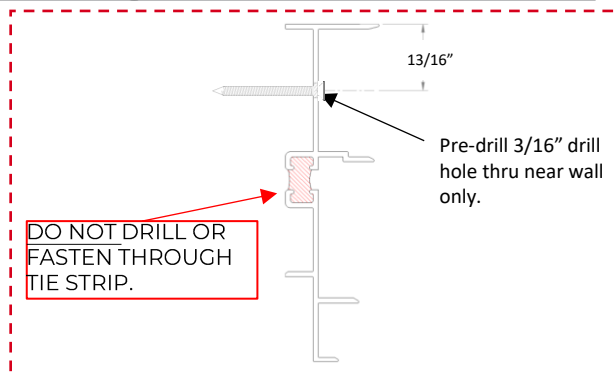




Drive minimum QTY 6X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall. Add additional fasteners as necessary to meet the spacing criteria.

A250 Sliding Glass Doors - Sill

A250 Sliding Glass Doors - Head

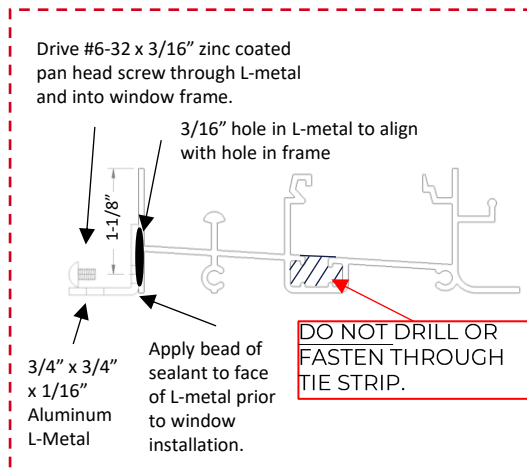

Drive minimum QTY 3X #8-15 x 2" zinc coated flat head wood screws through L bracket and into rough opening. Add additional fasteners as necessary to meet the spacing criteria.

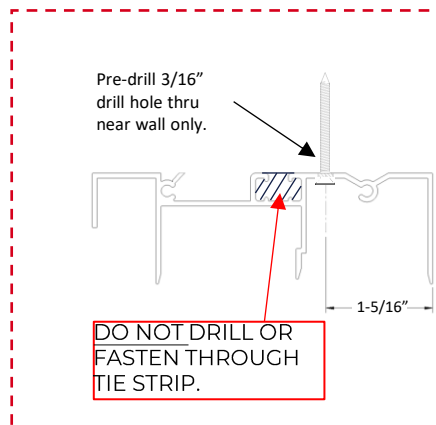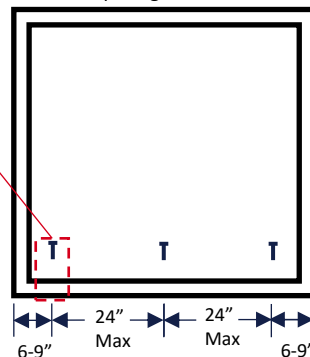

Drive QTY 1X #8-15 x 2" zinc coated flat head wood screws at designated locations flush with inner wall.