


Horizontal Sliding Window

Hz Configurations

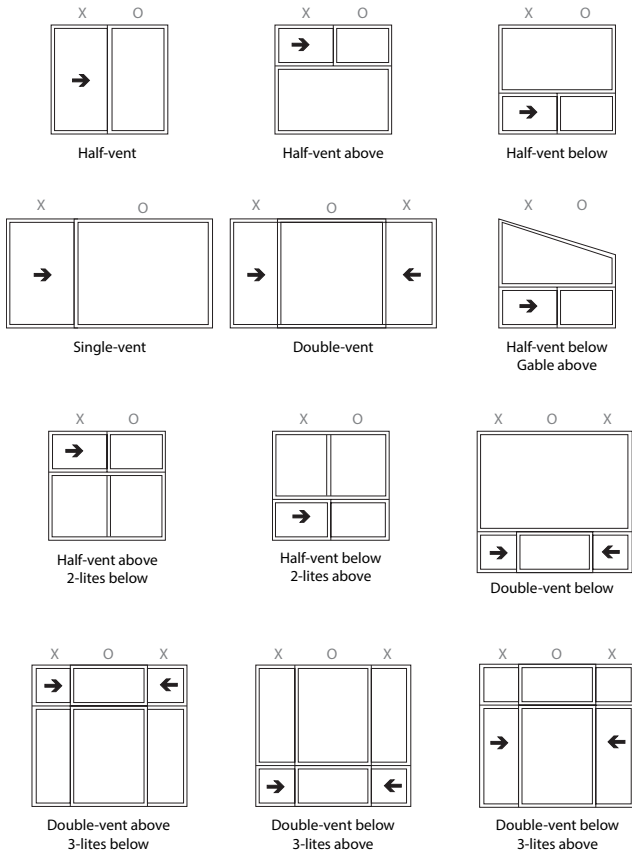

Hz Minimum/Maximum Sizes

HALF-VENT

- Min 2⁰1⁶ Max 6⁰6⁰

HALF-VENT ABOVE

- Min 2⁰3⁰ Max 6⁰6⁰

HALF-VENT BELOW

- Min 2⁰3⁰ Max 6⁰6⁰

DOUBLE-VENT

- Min 3⁰1⁶ Max 12⁰6⁰

DOUBLE-VENT BELOW

- Min 4⁰3⁰ Max 8⁰6⁰

DOUBLE-VENT ABOVE

- Min 4⁰3⁰ Max 8⁰6⁰

Minimum egress for half-vent is 4⁰4⁰

Minimum egress for double-vent is 8⁰4⁰ with a 24" vent.

Hz Available Frame Styles

NO NAIL-ON FIN:

8120T Block Frame

8170T 1-5/8" Narrow Z-Bar (Tuscany only)

8140T 2-1/8" Wide Z-Bar (Tuscany only)

INCLUDES NAIL-ON FIN:

8120T 1-3/8" Nail Fin Setback

8130T 1" Nail Fin Setback with Stucco Key

8140T 1-3/8" Nail Fin Setback, 2" Long Nail Fin

8140T 1-3/8" Nail Fin Setback, 2" Long Nail Fin with optional:

- 3/4" Flat J-channel
- 1" Contoured J-channel
- 2" Brickmold-style J-channel
- Welded Brickmold

NOTE: For engineering approval contact your Milgard representative for any configuration over 40 square feet. Each Milgard Manufacturing plant reserves the right to alter or change sizes and configurations according to location capabilities. Ask your Milgard rep about specialty applications. Windows over 40 square feet shipped open for field glazing. Varies by location.

Not all frame styles available at all Milgard locations. Contact your Milgard Representative for more information.