


# Picture and Radius Window

## Configurations

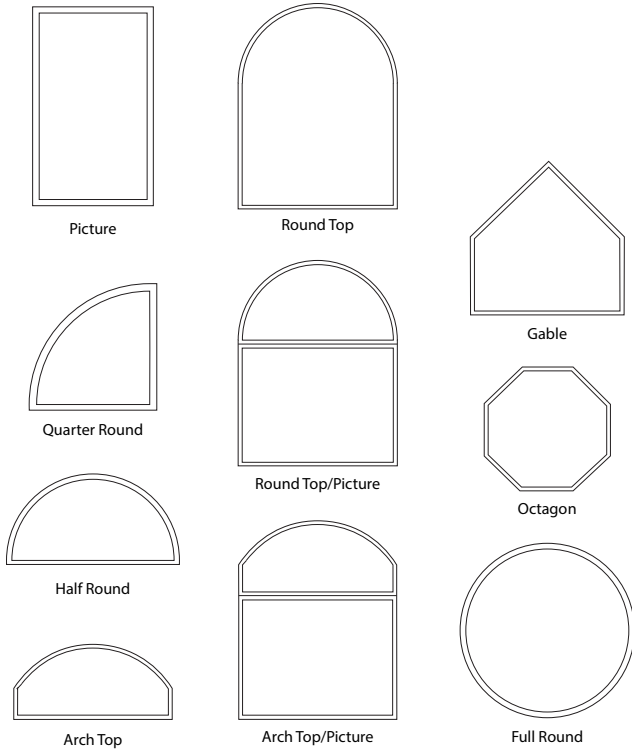

## Minimum/Maximum Sizes

### PICTURE WINDOW

- Min 1<sup>6</sup>1<sup>6</sup> Max 8<sup>0</sup>6<sup>0</sup>

### OCTAGON

- Min 2<sup>0</sup>2<sup>0</sup> Max 6<sup>0</sup>6<sup>0</sup>

### HALF ROUNDS

- Min 2<sup>6</sup>1<sup>3</sup> Max 8<sup>0</sup>4<sup>0</sup>

### QUARTER ROUNDS

- Min 1<sup>3</sup>1<sup>3</sup> Max 5<sup>0</sup>5<sup>0</sup>

### FULL ROUND

- Min 2<sup>6</sup>2<sup>6</sup> Max 5<sup>0</sup>5<sup>0</sup>

### ARCH TOPS

- 48 square feet maximum
- Min 2<sup>6</sup>2<sup>6</sup> Max 8<sup>0</sup>6<sup>0</sup>

Must specify leg height and center height  
(minimum 6" leg height)

## Available Frame Styles

### NO NAIL-ON FIN

(Tuscany horizontal sliding window frame):

8320T Block Frame

8370T 1-5/8" Narrow Z-Bar (Tuscany only)

8340T 2-1/8" Wide Z-Bar (Tuscany only)

### INCLUDES NAIL-ON FIN:

8320T 1-3/8" Nail Fin Setback

8330T 1" Nail Fin Setback with Stucco Key

8340T 1-3/8" Nail Fin Setback, 2" Long Nail Fin

8340T 1-3/8" Nail Fin Setback, 2" Long Nail Fin with optional:

- 3/4" Flat J-channel
- 1" Contoured J-channel
- 2" Brickmold-style J-channel
- Welded Brickmold

*NOTE: For engineering approval contact your Milgard representative for any configuration over 40 square feet. Each Milgard Manufacturing plant reserves the right to alter or change sizes and configurations according to location capabilities. Ask your Milgard rep about specialty applications. Windows over 40 square feet shipped open for field glazing. Varies by location.*

*Not all frame styles available at all Milgard locations. Contact your Milgard Representative for more information.*