



# C650 Door

## ADA Compliant Features

Milgard is the resource for all of your door needs. Do you have a project that utilizes standard doors as well as requires doors with ADA features, while wanting to keep the same aesthetic appearance throughout the project?

Milgard is proud to offer fiberglass doors with ADA compliant features. Our Ultra™ Series | C650 in-swing and out-swing doors are available in a virtually identical model with ADA compliant features, including a 32-inch clear opening, 10-inch bottom rail and 1/2" sill for universal access. It is sold as a complete pre-hung door system.

Get the great looks and maintain consistency throughout your next design project with Milgard fiberglass doors.

### ADA Compliant Features

- 1/2" high threshold
- 10" bottom rail with stainless steel kick plate
- Minimum clear width opening of 32"

### Glass

- Standard Dual Glaze
- SunCoat® (Low-E2) or SunCoatMAX® (Low-E3)
- Obscure, tint, and reflective glass available

### Grid Options

- Flat internal grids: 5/8"
- Sculptured internal grids: 1-1/16"
- Simulated divided lites: 3/4" Standard Vintage or 1-1/8" Standard Vintage, Legacy, and Craftsman

### Fiberglass Doors with the ADA Prep Package:

- In-swing and out-swing fiberglass doors
- 1- and 2-panel doors
- 4-9/16" or 6-9/16" wall condition
- Door heights up to 8'
- Transoms: Direct set and panel set
- Multi-point lock system
- Sidelites not available

Ultra Series | C650 doors are available in four exterior colors with white or color-matched interior.


**Handle:** Madrona™ and ADA compliant

**Hardware Finishes:** White, Dark Bronze, Brushed Chrome, Satin Nickel, Slate Black



**In-Swing  
Series 3942/3962**


4-9/16" or 6-9/16" wall condition

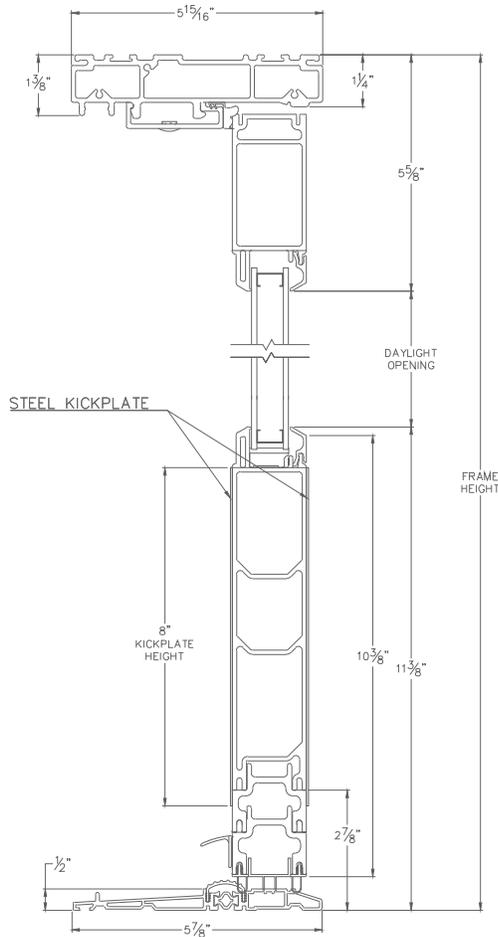

**HEAD & SILL**

**Out-Swing  
Series 3945/3965**

4-9/16" or 6-9/16" wall condition

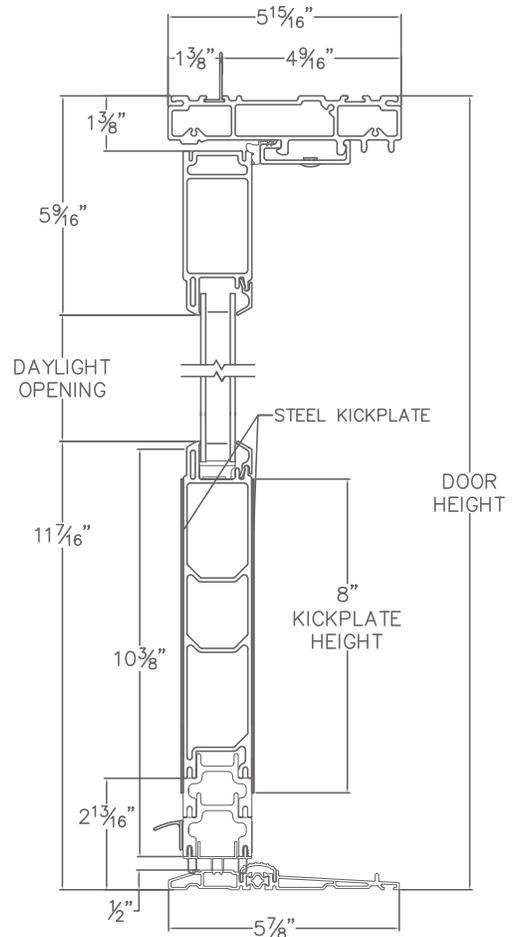

**HEAD & SILL**

Also available in 1" nail fin setback wall condition.

	U-Value	SHGC Low-E2/Low-E3	1-Panel Min/Max Rough Opening	2-Panel Min/Max Rough Opening
Suncoat®   Clear w/ Argon	0.34	0.21	38-1/2"x80"/38-1/2"x96" Calculated Glass Area: 1,693 sq. in./2,123 sq. in.	74"x80"/74"x96" Calculated Glass Area: 3,387 sq. in./4,248 sq. in.
SuncoatMax®   4th Surface High Performance	0.26	0.21		

Ultra™, SunCoat® and SunCoatMAX® are trademarks of Milgard Manufacturing, LLC

Milgard doors meet criteria for structural integrity and reliable performance established by the American Architectural Manufacturers Association (AAMA).

Consult your Milgard representative for specific test information.